



**ROCHESTER
GAUGES INT.**

1 ¼" Magnetic Liquid-Level Gauges For LP Gas Service

7200/
B7200

Application

The 7200 and B7200 Series Junior™ gauges are identical except the former has a zinc die-cast head and the latter has a forged-brass head. Both types have 1 ¼" Male NPTF threads and 2" [51] hex-wrenching sections and are equipped with direct-reading dials appropriate for the tanks in which they are installed.

General Information & Features*

Model 7281 and B7281 direct-indicating gauges are for top mounting. When used on above-ground ASME, horizontal, domestic storage tanks, they are equipped with 5323S01749 percentage or 5323S01789 fractional dials. When used on tanks buried underground, they are equipped 5323S01813 percentage dials. Most 420# [190kg] vertical cylinders utilize the 5323S01835 dial. For dials used on other vertical cylinders, contact Rochester.

Model 7284 and B7284 gauges are for side, end or angle mounting. When used on ASME motor-fuel tanks they are equipped with 5323S01789 fractional dial. Please contact Rochester for the part numbers of the various dials used on gauges mounted in lift-truck cylinders.

Model 7241 (top mounting) and 7244 (side-end-or angle mounting) gauges incorporate a stronger magnet required to drive TwinSite™ senders in motor-fuel applications. These gauges can be furnished less dial with 5323S01789 fractional, direct-indicating dials or with the appropriate TwinSite™ sender, P5628S0537, 0-90Ω, or P5663S02527, 20-150Ω as required.

[METRIC]



1 ¼" Magnetic Liquid-Level
Gauges For LP Gas Service

See reverse side for dimensional data, materials of construction, performance, and advice on how to order.

ROCHESTER GAUGES INTERNATIONAL S.A.

Z.I. WAVRE NORD - AVENUE LAVOISIER, 6 - 1300 WAVRE - BELGIUM

Phone: +32(0)10241010 Fax: +32(0)10228139 Web site: <http://www.rochester-gauges.be> E-mail: info@rochester-gauges.be

MADE
IN
EUROPE

General Specifications*

Temperature Range

Standard range is 40°F to 158°F, -40C to 70C.

Accuracy

Dependent on proper sizing of gauge and tank configuration. With direct reading dials, overall accuracy is $\pm 5\%$; with TwinSite™ Sender, overall accuracy is $\pm 5\%$.

Current

TwinSite™ versions, 200 mA. Maximum

Voltage

24 volts maximum nominal system voltage on TwinSite™ versions.

Working Pressure

375 psig [25,8 Bar].

Approvals

Gauges are appropriately UL listed for LP Gas liquid-level service and/or LP Gas automotive accessories

Materials of Construction*

Head

Zinc die casting (7200 Series); brass forging (B7200 Series).

Centershaft Bearings, Gears, Pinion, Cross Stud & Bearing

Stainless Steel.

Gear Housing

Zinc die-casting or acetal.

Support, Centershaft & Float Rod

Tempered aluminum.

Float Bulb

Nitrile rubber or one-piece aluminum.

Counterweight

Lead.

Magnets

Alnico

Standard, Direct Reading Dials

Hermetically sealed polycarbonate.

Dial Screws


Stainless steel.

When ordering, specify:

1. The tank inside diameter (shown on tank nameplate).
2. The mounting location (top, side, end or angle).
3. If the gauge is angle mounted state the degree of angle above or below the horizontal centerline.
4. If the gauge is end mounted, state the shape of the tank head (hemispherical or semi-ellipsoidal).
5. The "H" dimension. This is the distance in inches from the surface of the tank to the top of the top threaded opening.

To order replacement gauge, simply furnish the information Stamped on one of the heads, as shown in the example.

Typical gauge head showing part number or tank code and Date code stamped on wrenching flats shown to the right.

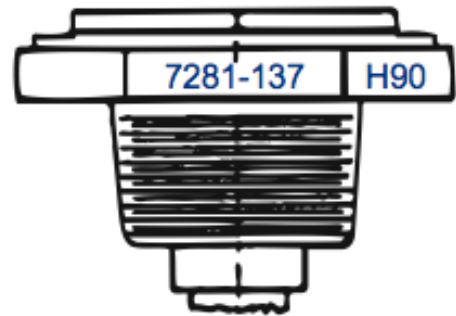

Typical Gauge

*Materials and specifications are subject to change without notice. Pressure ratings subject to change due to temperature and other Environmental considerations.