

## Lever Type Bulls Eye Gauge

F7384

### Application


The F7384 Bulls Eye Gauge is a 3/4" NPTF lever type gauge designed for use in monitoring liquid levels at High, Normal, and Low. It is used on crankcase and lubrication systems to provide level readings ensuring sufficient oil levels are maintained at all times



### General Information & Features

The F7384 Bulls Eye Gauge provides the same range of readings as a glass sight tube (2 connections required) with only one connection required on the tank.

- Easy to Read and Replaceable Dial

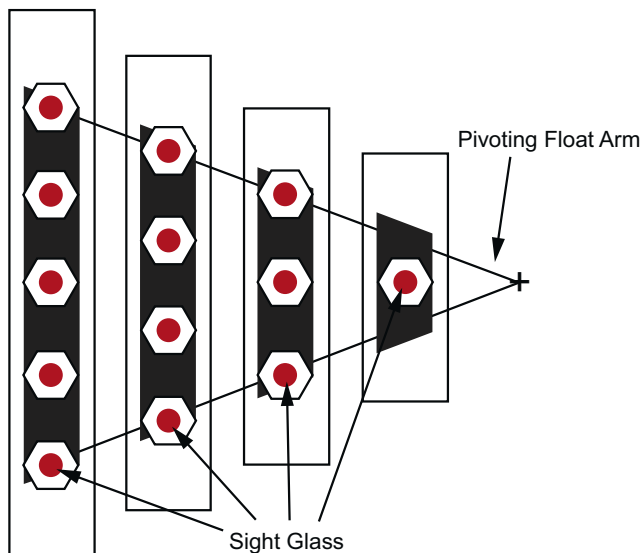

Float arm of Bulls Eye Gauge is meant to replace wide range of sight gauge heights.




Bulls Eye Dial provides easy to read distinct color coded levels (High - Yellow, Normal - Green, Low - Red)

Lever Type Bulls Eye Gauge

**F7384**

## Lever Type Bulls Eye Gauge

### Gauge Mounting Dimensions

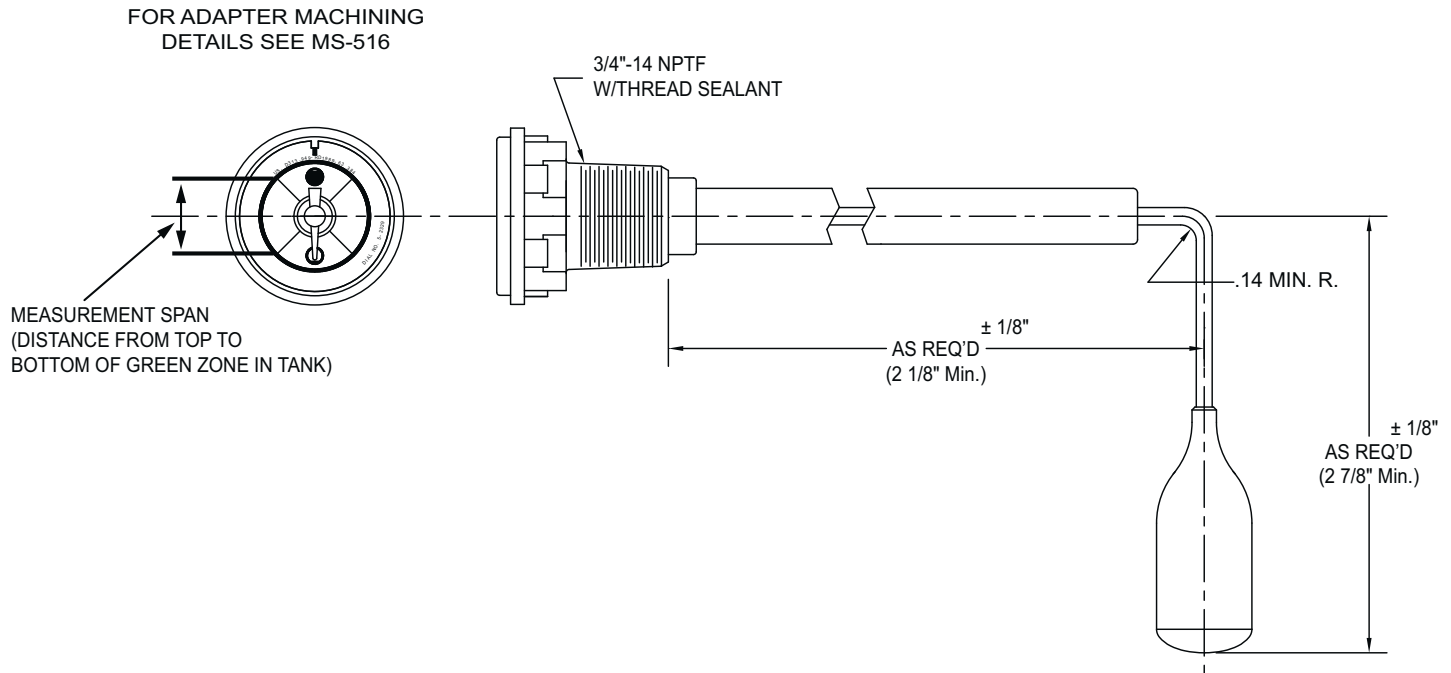

### General Specifications\*

#### Mounting

Designed for side mounting only.

#### Temperature

Standard operating range is -40°F to 158°F, -40°C to 70°C. At 150°F (49°C) air temperature, maximum oil temperature is 250°F (120°C).

#### Working Pressure

375 psig [25, 8 bar] with Zinc Head; 440 psig [30 bar] with Brass Head.

**Note:** For threaded gauge installation instructions see MS-516.

### When ordering, specify:

Measurement Span (Distance from Top to Bottom of Green Zone in Tank)

### Materials of Construction\*

#### Head

Die Cast Zinc (Also available in Brass).

#### Seal

Thread Sealant.

#### Guide Tube

Aluminum.

#### Centershaft

Aluminum.

#### Bearings

Stainless steel.

#### Float

Aluminum (Also available in Nitrile).

#### Drive Magnet

Alnico.

#### Standard Dial

Ultrasonically welded, hermetically sealed polycarbonate (Custom Dial Graphics Optional).

\* Materials and specifications are subject to change without notice.  
Pressure ratings subject to change due to temperature and other environmental considerations.

06/18/2015