## **TECHNICAL DATA**

## FR37x Fuel Level Sensor with Feed & Return





The FR37x range of Fuel Level Sensors are equipped with fuel feed and return pipes, removing the need for additional fuel extraction and filling connections and simplifying the fuel tank assembly and installation.

Fozmula's capacitance technology means no moving parts and, as a result; improved accuracy and reliability compared to mechanical alternatives.

This range has a modular design enabling a great deal of flexibility to provide customers with options to suit specific applications. In addition to the sensor probe length, fuel system designers can specify:

- Resistive output range
- Level alarm height
- 5 or 6 hole SAE mounting
- Feed and return tube lengths and designs
- Inlet and outlet connector types & sizes
- Breather type
- Suction pipe filter
- Electrical connection type

## **SPECIFICATION**

## **Liquid Types**

Liquids compatible with the construction materials, typically fuels, oils and water.

#### **Dimensions**

Length: Min. 150 mm, Max. 1,200 mm.

**Mounting:** 5 or 6-hole SAE.

Weight: 0.55 Kg (gauge length of 300 mm).

**Materials** 

**Header:** Die-cast zinc alloy.

Wetted materials: Stainless steel, polypropylene, Viton™, PTFE.

Fuel connectors: Brass.
Feed & return tubes: Aluminium.

### **Electrical**

**Supply Voltage:** 9-36 VDC. **Supply Current:** 15 mA@12 VDC.

**Supply Protection:** Over voltage 80 VDC for 2 minutes.

Reverse polarity.

**Connections:** 4-off 500 mm long 18 AWG XLPE leads:

Red	Supply, V+
Black	Ground (0 V)
Green	Resistive output
White	Switch to ground

## **Outputs**

**Resistive:** Any values between 0-501  $\Omega$  or 501-0  $\Omega$  (3  $\Omega$  Steps).

**Resolution:** 3  $\Omega$ . **Max. dissipation:** 250 mW.

Alarm Output: Switch to ground. Max 100 mA.

High or low level between 7% and 90% of active gauge length. Default setting: low level alarm at 12% of active gauge length.

## **Environmental Ratings**

Designed to meet:

Ingress: IP67.

Operating Temp: -40 °C to 85 °C.

Max tank pressure: 1 bar.

**EMC:** Type approval in accordance with EN ISO 13766:2006.

Vibration: 500mm sensor to be type tested to 1.88 Grms BS EN 60068-2-4:1995.

**Shock:** 500 m·s<sup>-2</sup>, 11 ms, BS EN 60068-2-27:1993.

Hermes Close | Tachbrook Park | Warwick | CV34 6UF | United Kingdom Tel: +44 (0)1926 466700 | Fax: +44 (0)1926 450473 | sales@fozmula.com

www.fozmula.com


## **TECHNICAL DATA**

# FR37x Fuel Level Sensor with Feed & Return



### **Options**


#### Fuel inlet/outlet:

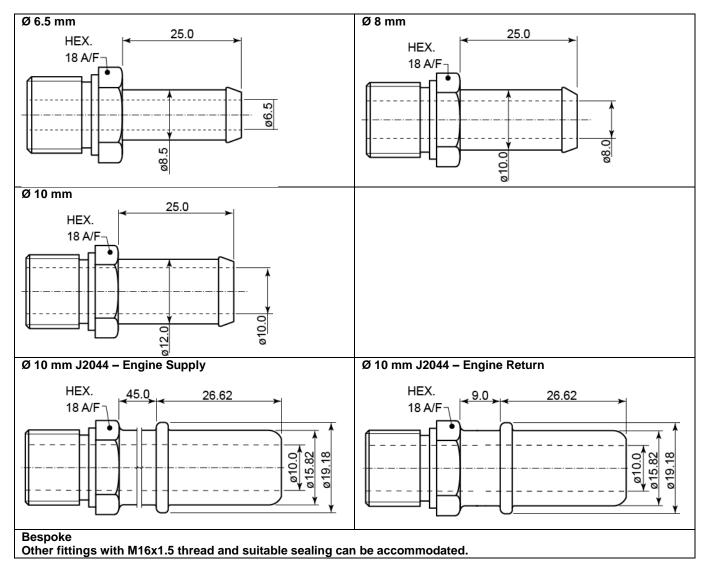

**Electrical connector:** The FR37x can be supplied with any suitable style of plug or receptacle.

Fuel filter: Fuel filter – 178 micron

**Breather:** Breather (standard shown below or specify any of the above inlet/outlet fittings) or blanking plug:

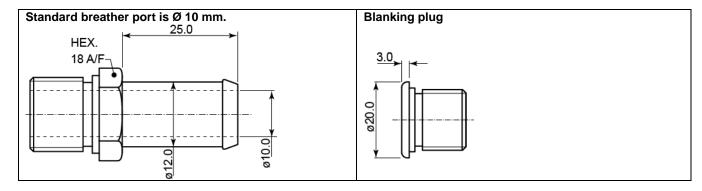

Hermes Close | Tachbrook Park | Warwick | CV34 6UF | United Kingdom Tel: +44 (0)1926 466700 | Fax: +44 (0)1926 450473 | sales@fozmula.com


www.fozmula.com

## **TECHNICAL DATA**

## FR37x Fuel Level Sensor with Feed & Return



#### **Installation drawings:**

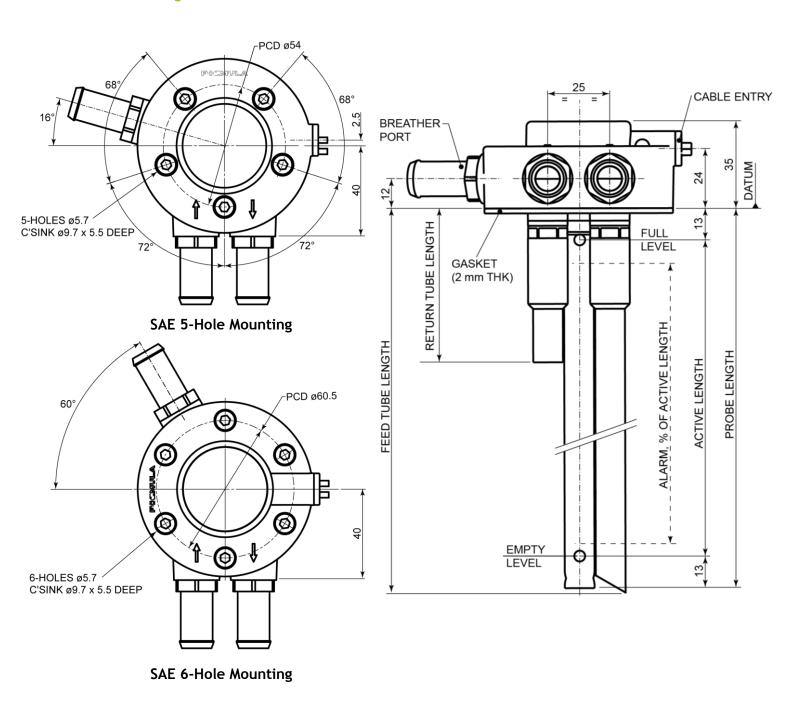

Hermes Close | Tachbrook Park | Warwick | CV34 6UF | United Kingdom Tel: +44 (0)1926 466700 | Fax: +44 (0)1926 450473 | sales@fozmula.com

www.fozmula.com